

# BRICKMAN 300 CARDBOARD

BRICKMAN

**THIS VERSION OF BRICKMAN 300 IS DESIGNED FOR EFFECTIVE COMPACTION OF LARGE AMOUNTS OF DRY CARDBOARD.**

The automated solution is time-saving and convenient. Due to a small footprint and low sound emission, Brickman 300 can be placed indoors close to the source of waste.



**Automatic  
solution**



**250** KG/H

CAPACITY  
CARDBOARD

## Orwak benefits

### **MORE PRODUCTIVE USE OF TIME**

Less time spent on waste handling, more time for your core activities!

### **MORE SPACE & ORDER**

Our balers rapidly minimize the space the waste takes up, keeping aisles free and tidy.

### **LESS COSTS, MORE VALUE**

More compaction = less waste volume to transport. Fewer transports required results in lower transportation costs and reduced CO<sub>2</sub> emissions. Sorting at source yields a higher quality of waste material for recycling.



## Why Brickman?

- + Convenient fully automated compaction solution
- + Impressive volume reduction of up to 20:1
- + Placement opportunities indoors

[www.orwak.com](http://www.orwak.com)

**ORWAK®**

# BRICKMAN 300 CARDBOARD

## BRICKMAN 300 CARDBOARD IS OPTIMIZED FOR:

### CARDBOARD

+ Corrugated cardboard

### CAPACITY

Up to 250 kg/h



### DESIGNED FOR CARDBOARD COMPACTION

The model Brickman 300 Cardboard is ideal for compaction of dry cardboard and paper. The compaction pressure is up to 500 kg/cm<sup>2</sup>.

### GREAT LOGISTICS

Thanks to Brickman's compact dimensions and low sound emission, it can be placed indoors close to the waste disposal station.

### CONVENIENT AND EFFICIENT

Brickman offers time-saving and comfortable waste handling. The press can be fed while running, there is no lid or door to open when loading the material and the ready briquettes require no binding. Furthermore, optional photocells can automatize the start function. The material infeed and briquette outfeed are easy to integrate in system solutions.



### OPTIONAL ACCESSORIES

Brickman 300 Cardboard can be ordered with a number of accessories; different chute options, start systems, sound absorption plates as well as heating and cooling devices.

## DIMENSIONS & SPECIFICATIONS

### DIMENSIONS (MM)

A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P
2270	1950	1360	1500	1880	850	2190	3040	140	950	210	840	1440	600	825	1100

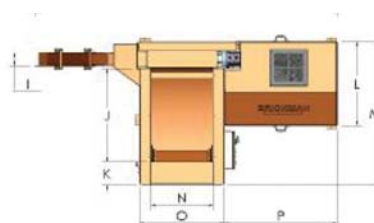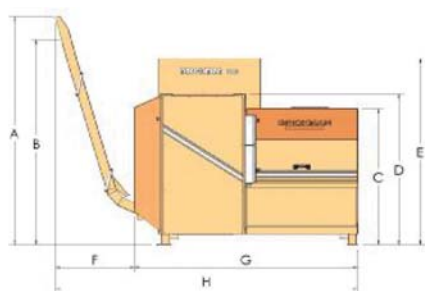

### TECHNICAL SPECIFICATIONS

MACHINE WEIGHT	PRESS FORCE	PRESSURE	HOPPER	BRIQUETTE SIZE	DENSITY*	NOISE LEVEL	OPERATING POWER
1600 kg	25 ton, 250 kN	Up to 500 kg/cm <sup>2</sup>	0.75 m <sup>2</sup>	80x80x100-300 mm	Up to 600 kg/m <sup>3</sup>	68 db (A)	400 V, 3-phase, 50 Hz** Fuse: 25 A (slow) Engine: 7.5 kW Voltage: 24 V Protec. class: IP 55

We reserve the right to make changes to specifications without prior notice. \* Density varies with type of material. \*\* Other voltages are available

Orwak AB  
Svetsaregatan 4  
S-576 33 Sävsjö  
SWEDEN  
Tel: +46-(0)382-157 00  
info@orwak.com, www.orwak.com




**BRICKMAN**

**BRICKMAN**

# 300 ALUMINUM & SHREDDED PAPER

**THIS VERSION OF BRICKMAN 300 WITH EXTENDED CYLINDER IS DESIGNED FOR EFFECTIVE COMPACTION OF ALUMINIUM MATERIAL SUCH AS CANS & CHIPS, SHREDDED PAPER AND PAPER OFFCUTS IN GRAPHIC INDUSTRY.**

The automated solution is time-saving and convenient. Due to a small footprint and low sound emission, Brickman 300 can be placed indoors close to the source of waste.

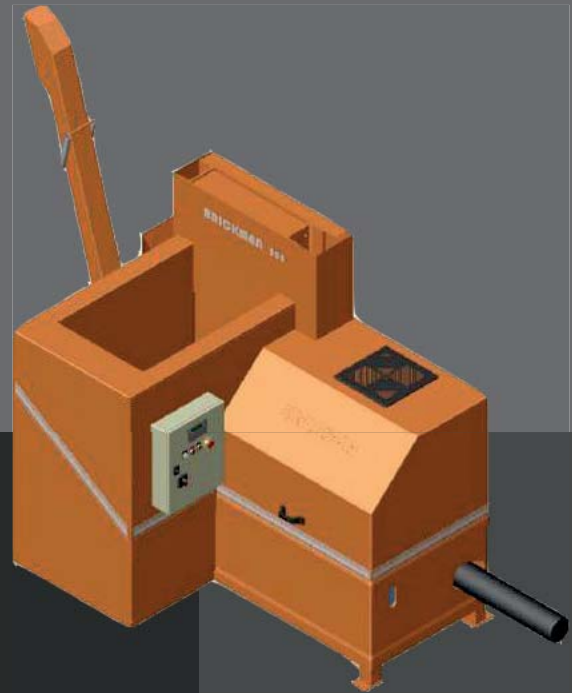

## Automatic solution



**300** KG/H

CAPACITY  
ALUMINIUM CHIPS &  
SHREDDED PAPER

## Orwak benefits

### **MORE PRODUCTIVE USE OF TIME**

Less time spent on waste handling, more time for your core activities!

### **MORE SPACE & ORDER**

Our balers rapidly minimize the space the waste takes up, keeping aisles free and tidy.

### **LESS COSTS, MORE VALUE**

More compaction = less waste volume to transport. Fewer transports required results in lower transportation costs and reduced CO<sub>2</sub> emissions. Sorting at source yields a higher quality of waste material for recycling.



## Why Brickman?

- + Convenient fully automated compaction solution
- + Impressive volume reduction of up to 20:1
- + Placement opportunities indoors

[www.orwak.com](http://www.orwak.com)

 **ORWAK**<sup>®</sup>

# BRICKMAN

## 300 ALU & SHREDDED PAPER



### CONVENIENT AND EFFICIENT

Brickman offers time-saving and comfortable waste handling. The press can be fed while running, there is no lid or door to open when loading the material and the ready briquettes require no binding. Furthermore, optional photocells can automatize the start function. The material infeed and briquette outfeed are easy to integrate in system solutions.

### GREAT LOGISTICS

Thanks to Brickman's compact dimensions and low sound emission, it can be placed indoors close to the waste disposal station.

### BRICKMAN 300 ALU & SHREDDED PAPER IS OPTIMIZED FOR:

#### ALUMINUM

+ Aluminum cans  
+ Aluminum chips

#### CAPACITY

up to 160 kg/h  
up to 300 kg/h

#### PAPER

+ Shredded paper up to 300 kg/h

### DESIGNED FOR ALU AND SHREDDED PAPER

Thanks to the following features, this sturdy version of Brickman 300 is especially designed for compaction of aluminum cans, shredded paper and paper offcuts:

- + Extension on press cylinder
- + Automatic greasing of the press plate

### OPTIONAL ACCESSORIES

Brickman 300 can be ordered with a number of accessories; different chute options, start systems, sound absorption plates as well as heating and cooling devices.


## DIMENSIONS & SPECIFICATIONS

### DIMENSIONS (MM)

A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R
2270	1950	Ø145	425	1360	1500	1880	850	2190	660	3700	140	950	210	245	840	1440	600

### DIMENSIONS (MM)

S	T
825	1100

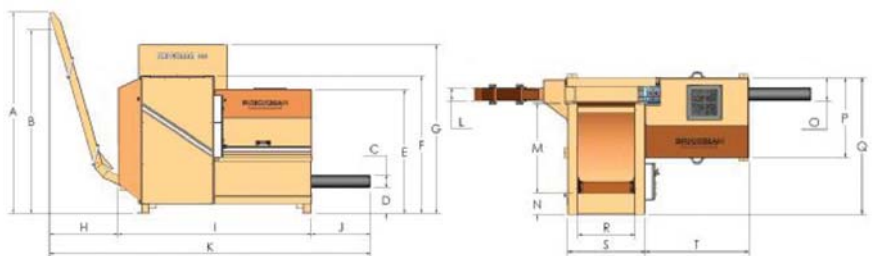

### TECHNICAL SPECIFICATIONS

MACHINE WEIGHT	PRESS FORCE	PRESSURE	HOPPER	BRIQUETTE SIZE	DENSITY*	NOISE LEVEL	OPERATING POWER
1600 kg	25 ton, 250 kN	Up to 500 kg/cm <sup>2</sup>	0.75 m <sup>2</sup>	80x80x100-300 mm	Up to 1200 kg/m <sup>3</sup>	68 db (A)	400 V, 3-phase, 50 Hz** Fuse: 25 A (slow) Engine: 7.5 kW Voltage: 24 V Protec. class: IP 55

We reserve the right to make changes to specifications without prior notice. \* Density varies with type of material. \*\* Other voltages are available

Orwak AB  
Svetsaregatan 4  
S-576 33 Sävsjö  
SWEDEN  
Tel: +46-(0)382-157 00  
info@orwak.com, www.orwak.com




**BRICKMAN**

# BRICKMAN 300 PLASTIC

**THIS VERSION OF BRICKMAN 300 WITH EXTENDED CYLINDER IS DESIGNED FOR EFFECTIVE COMPACTION OF LARGE AMOUNTS OF TOUGH MATERIAL LIKE PET AND OTHER PLASTIC CONTAINERS.**

The automated solution is time-saving and convenient. Due to a small footprint and low sound emission, Brickman 300 can be placed indoors close to the source of waste.

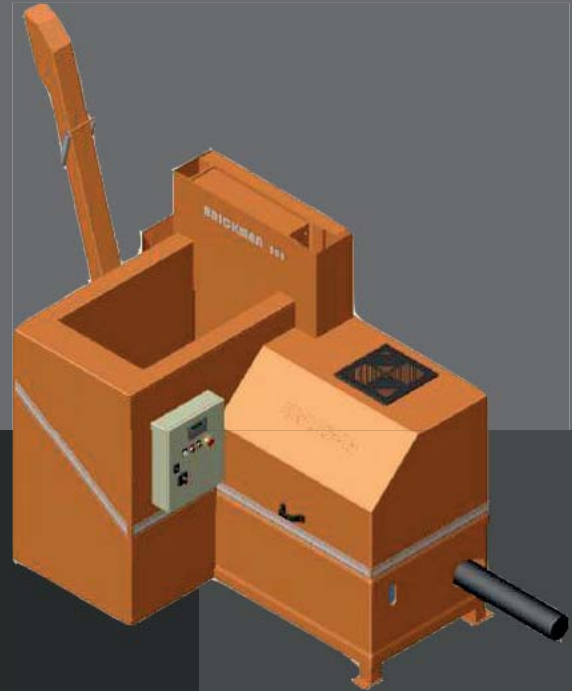

## Automatic solution



**20** KG/H  
CAPACITY  
PET BOTTLES

## Orwak benefits

### MORE PRODUCTIVE USE OF TIME

Less time spent on waste handling, more time for your core activities!

### MORE SPACE & ORDER

Our balers rapidly minimize the space the waste takes up, keeping aisles free and tidy.

### LESS COSTS, MORE VALUE

More compaction = less waste volume to transport. Fewer transports required results in lower transportation costs and reduced CO<sub>2</sub> emissions. Sorting at source yields a higher quality of waste material for recycling.



## Why Brickman?

- + Convenient fully automated compaction solution
- + Impressive volume reduction of up to 20:1
- + Placement opportunities indoors

[www.orwak.com](http://www.orwak.com)

 **ORWAK**<sup>®</sup>

# BRICKMAN 300 PLASTIC



## CONVENIENT AND EFFICIENT

Brickman offers time-saving and comfortable waste handling. The press can be fed while running, there is no lid or door to open when loading the material and the ready briquettes require no binding. Furthermore, optional photocells can automate the start function. The material infeed and briquette outfeed are easy to integrate in system solutions.

## GREAT LOGISTICS

Thanks to Brickman's compact dimensions and low sound emission, it can be placed indoors close to the waste disposal station.

## BRICKMAN 300 PLASTIC IS OPTIMIZED FOR:

### PLASTIC

+ PET bottles  
+ Plastic containers

### CAPACITY

up to 170 kg/h

## DESIGNED FOR PLASTIC

Thanks to the following features, this sturdy version of Brickman 300 is especially designed for compaction of empty PET bottles and other plastic containers:

- + Extension on press cylinder
- + Automatic greasing of the press plate
- + Reinforced material in press chamber, press plate, cutting blades, guide piston and press loop

## OPTIONAL ACCESSORIES

Brickman 300 Plastic can be ordered with a number of accessories; different chute options, start systems, sound absorption plates as well as heating and cooling devices.


## DIMENSIONS & SPECIFICATIONS

### DIMENSIONS (MM)

A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R
2270	1950	Ø145	425	1360	1500	1880	850	2190	660	3700	140	950	210	245	840	1440	600

### DIMENSIONS (MM)

S	T
825	1100

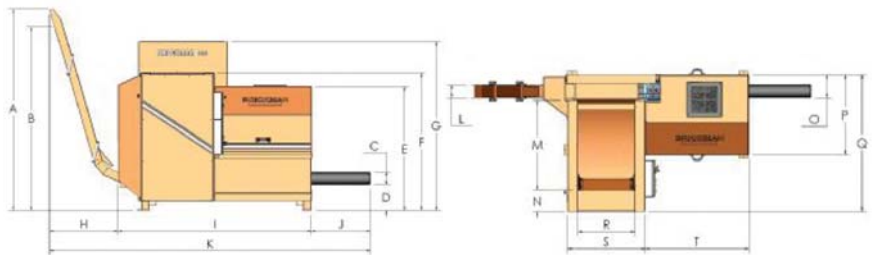

### TECHNICAL SPECIFICATIONS

MACHINE WEIGHT	PRESS FORCE	PRESSURE	HOPPER	BRIQUETTE SIZE	DENSITY*	NOISE LEVEL	OPERATING POWER
1600 kg	25 ton, 250 kN	Up to 500 kg/cm <sup>2</sup>	0.75 m <sup>2</sup>	80x80x100-300 mm	Up to 600kg/m <sup>2</sup>	68 db (A)	400 V, 3-phase, 50 Hz** Fuse: 25 A (slow) Engine: 7.5 kW Voltage: 24 V Protec. class: IP 55

We reserve the right to make changes to specifications without prior notice. \* Density varies with type of material. \*\* Other voltages are available

Orwak AB  
Svetsaregatan 4  
S-576 33 Sävsjö  
SWEDEN  
Tel: +46-(0)382-157 00  
info@orwak.com, www.orwak.com




**BRICKMAN**

# BRICKMAN 300 LIQUID

**THIS VERSION OF BRICKMAN 300 WITH EXTENDED CYLINDER IS DESIGNED FOR EFFECTIVE COMPACTION OF LARGE AMOUNTS OF PET BOTTLES AND ALUMINUM CANS CONTAINING LIQUID.**

The automated solution is time-saving and convenient. Due to a small footprint and low sound emission, Brickman 300 can be placed indoors close to the source of waste.

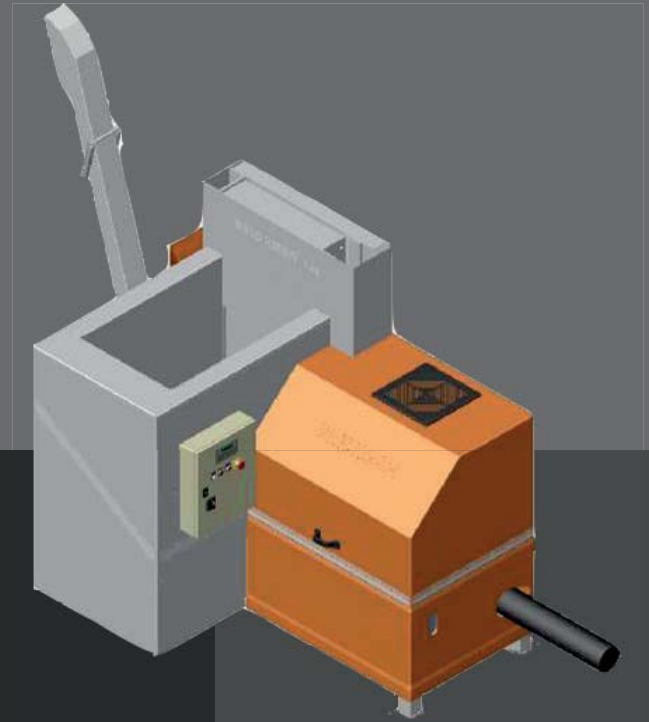

## Automatic solution



**70** KG/H

CAPACITY  
FILLED PET BOTTLES

## Orwak benefits

### MORE PRODUCTIVE USE OF TIME

Less time spent on waste handling, more time for your core activities!

### MORE SPACE & ORDER

Our balers rapidly minimize the space the waste takes up, keeping aisles free and tidy.

### LESS COSTS, MORE VALUE

More compaction = less waste volume to transport. Fewer transports required results in lower transportation costs and reduced CO<sub>2</sub> emissions. Sorting at source yields a higher quality of waste material for recycling.



## Why Brickman?

- + Convenient fully automated compaction solution
- + Impressive volume reduction of up to 20:1
- + Placement opportunities indoors

[www.orwak.com](http://www.orwak.com)

 **ORWAK**<sup>®</sup>

# BRICKMAN 300 LIQUID



## CONVENIENT AND EFFICIENT

Brickman offers time-saving and comfortable waste handling. The press can be fed while running, there is no lid or door to open when loading the material and the ready briquettes require no binding. Furthermore, optional photocells can automatize the start function. The material infeed and briquette outfeed are easy to integrate in system solutions.

## GREAT LOGISTICS

Thanks to Brickman's compact dimensions and low sound emission, it can be placed indoors close to the waste disposal station.

## BRICKMAN 300 LIQUID IS OPTIMIZED FOR:

FILLED CONTAINERS	CAPACITY
+ PET bottles	up to 170 kg/h
+ Aluminium cans	up to 160 kg/h

## DESIGNED FOR CONTAINERS FILLED WITH LIQUID

Thanks to the following features, this sturdy version of Brickman 300 is especially designed for compaction of bottles and aluminum cans containing liquid:

- + Extension on press cylinder
- + Automatic greasing of the press plate
- + Reinforced material in press chamber, press plate, cutting blades, guide piston and press loop
- + Hopper, covers, shafts and briquette chute made of stainless steel
- + Galvanized machine stand and press plate

## OPTIONAL ACCESSORIES

Brickman 300 Liquid can be ordered with a number of accessories; different chute options, start systems, sound absorption plates as well as heating and cooling devices.


## DIMENSIONS & SPECIFICATIONS

### DIMENSIONS (MM)

A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R
2270	1950	Ø145	425	1360	1500	1880	850	2190	660	3700	140	950	210	245	840	1440	600

### DIMENSIONS (MM)

S	T
825	1100

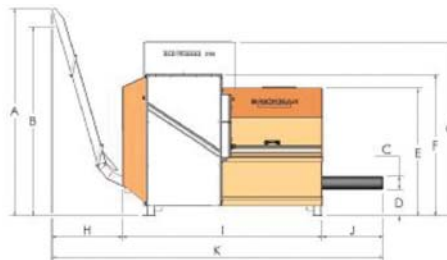

### TECHNICAL SPECIFICATIONS

MACHINE WEIGHT	PRESS FORCE	PRESSURE	HOPPER	BRIQUETTE SIZE	DENSITY*	NOISE LEVEL	OPERATING POWER
1600 kg	25 ton, 250 kN	Up to 500 kg/cm <sup>2</sup>	0.75 m <sup>2</sup>	80x80x100-300 mm	Up to 1000 kg/m <sup>3</sup>	68 db (A)	400 V, 3-phase, 50 Hz** Fuse: 25 A (slow) Engine: 7.5 kW Voltage: 24 V Protec. class: IP 55

We reserve the right to make changes to specifications without prior notice. \* Density varies with type of material. \*\* Other voltages are available

Orwak AB  
Svetsaregatan 4  
S-576 33 Sävsjö  
SWEDEN  
Tel: +46-(0)382-157 00  
info@orwak.com, www.orwak.com





**BRICKMAN**

# BRICKMAN 900K

**BRICKMAN 900K IS DEVELOPED TO MAKE THE TASK OF COMPACTING LARGE QUANTITIES OF BULKY WASTE, SUCH AS CARDBOARD AND PET BOTTLES AS SIMPLE AS POSSIBLE.**

The automated solution is time-saving and convenient and Brickman 900K has the capacity to process up to 750 kg material per hour!



## Automatic solution



**750** KG/H  
CAPACITY  
CARDBOARD

## Orwak benefits

### MORE PRODUCTIVE USE OF TIME

Less time spent on waste handling, more time for your core activities!

### MORE SPACE & ORDER

Our balers rapidly minimize the space the waste takes up, keeping aisles free and tidy.

### LESS COSTS, MORE VALUE

More compaction = less waste volume to transport. Fewer transports required results in lower transportation costs and reduced CO<sub>2</sub> emissions. Sorting at source yields a higher quality of waste material for recycling.



## Why Brickman?

- + Convenient fully automated compaction solution
- + Impressive volume reduction of up to 20:1
- + Placement opportunities indoors

[www.orwak.com](http://www.orwak.com)

 **ORWAK®**

# BRICKMAN 900K



## CONVENIENT AND EFFICIENT

Brickman offers time-saving and comfortable waste handling. The press can be fed while running, there is no lid or door to open when loading the material and the ready briquettes require no binding. Furthermore, optional photocells can automate the start function. The material infeed and briquette outfeed are easy to integrate in system solutions.

## GREAT LOGISTICS

Thanks to Brickman's compact dimensions and low sound emission, it can be placed indoors close to the waste disposal station.

## BRICKMAN 900K IS OPTIMIZED FOR:

### CARDBOARD

+ Corrugated cardboard

### CAPACITY

up to 750 kg/h

### PLASTIC

+ PET bottles

### CAPACITY

up to 600 kg/h

## DESIGNED FOR HEAVY DUTY

Thanks to the following features, the robust briquette press Brickman 900K is especially designed for compaction of large volumes of cardboard and empty PET bottles:

- + Extension on press cylinder
- + Automatic greasing of the press plate
- + Reinforced material in press chamber, press plate, cutting blades, guide piston and press loop

## OPTIONAL ACCESSORIES

Brickman 900K can be ordered with a number of accessories; different chute options, start systems, sound absorption plates as well as heating and cooling devices.



## DIMENSIONS & SPECIFICATIONS

### DIMENSIONS (MM)

A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R
2470	2010	585	1350	1420	1870	5710	1355	685	1545	945	1180	2430	265	1900	690	1350	535

### DIMENSIONS (MM)

S	T	U	V
840	1960	1300	1155

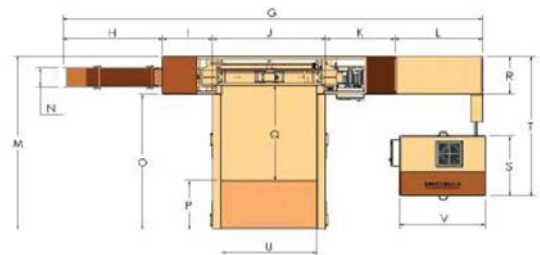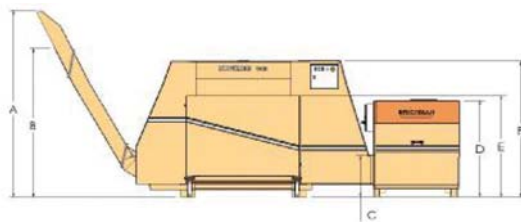

### TECHNICAL SPECIFICATIONS

MACHINE WEIGHT	PRESS FORCE	PRESSURE	HOPPER	BRIQUETTE SIZE	DENSITY*	NOISE LEVEL	OPERATING POWER
3700 kg	25 ton, 250 kN	Up to 62 kg/cm <sup>2</sup>	2 m <sup>2</sup>	200x200x100-300 mm	Up to 400 kg/m <sup>3</sup>	68 db (A)	400 V, 3-phase, 50 Hz** Fuse: 25 A (slow) Engine: 7.5 kW Voltage: 24 V Protec. class: IP 55

We reserve the right to make changes to specifications without prior notice. \* Density varies with type of material. \*\* Other voltages are available

Orwak AB  
Svetsaregatan 4  
S-576 33 Sävsjö  
SWEDEN  
Tel: +46-(0)382-157 00  
info@orwak.com, www.orwak.com



# BRICKMAN 1200K

BRICKMAN

**BRICKMAN 1200K IS DEVELOPED TO MAKE THE TASK OF COMPACTING EXTRA LARGE QUANTITIES OF BULKY WASTE, SUCH AS CARDBOARD AND PET BOTTLES AS SIMPLE AS POSSIBLE.**

The automated solution is time-saving and convenient and Brickman 1200K has the capacity to process up to 1100 kg material per hour!



## Automatic solution



**1100** KG/H  
CAPACITY  
CARDBOARD

## Orwak benefits

### MORE PRODUCTIVE USE OF TIME

Less time spent on waste handling, more time for your core activities!

### MORE SPACE & ORDER

Our balers rapidly minimize the space the waste takes up, keeping aisles free and tidy.

### LESS COSTS, MORE VALUE

More compaction = less waste volume to transport. Fewer transports required results in lower transportation costs and reduced CO<sub>2</sub> emissions. Sorting at source yields a higher quality of waste material for recycling.



## Why Brickman?

- + Convenient fully automated compaction solution
- + Impressive volume reduction of up to 20:1
- + Placement opportunities indoors

# BRICKMAN 1200K



## CONVENIENT AND EFFICIENT

Brickman offers time-saving and comfortable waste handling. The press can be fed while running, there is no lid or door to open when loading the material and the ready briquettes require no binding. Furthermore, optional photocells can automate the start function. The material infeed and briquette outfeed are easy to integrate in system solutions.

## GREAT LOGISTICS

Thanks to Brickman's compact dimensions and low sound emission, it can be placed indoors close to the waste disposal station.

## BRICKMAN 1200K IS OPTIMIZED FOR:

### CARDBOARD

+ Corrugated cardboard

### CAPACITY

up to 1100 kg/h

### PLASTIC

+ PET bottles

### CAPACITY

up to 900 kg/h

## DESIGNED FOR HEAVY DUTY

Thanks to the following features, the robust briquette press Brickman 1200K is especially designed for compaction of large volumes of cardboard and empty PET bottles:

- + Extension on press cylinder
- + Automatic greasing of the press plate
- + Reinforced material in press chamber, press plate, cutting blades, guide piston and press loop

## OPTIONAL ACCESSORIES

Brickman 1200K can be ordered with a number of accessories; different chute options, start systems, sound absorption plates as well as heating and cooling devices.



## DIMENSIONS & SPECIFICATIONS

### DIMENSIONS (MM)

A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R
2470	2010	585	1350	1420	1870	5710	1355	685	1545	945	1180	2430	265	1900	690	1350	535

### DIMENSIONS (MM)

S	T	U	V
840	1960	1300	1155

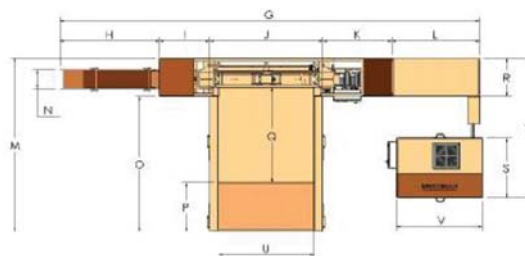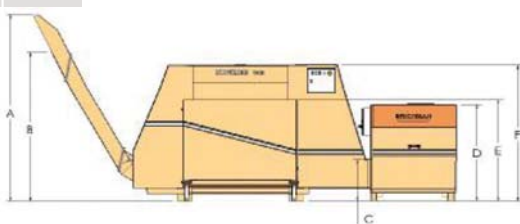

### TECHNICAL SPECIFICATIONS

MACHINE WEIGHT	PRESS FORCE	PRESSURE	HOPPER	BRIQUETTE SIZE	DENSITY*	NOISE LEVEL	OPERATING POWER
3800 kg	25 ton, 250 kN	Up to 62 kg/cm <sup>2</sup>	2 m <sup>2</sup>	200x200x100-300 mm	Up to 400 kg/m <sup>3</sup>	68 db (A)	400 V, 3-phase, 50 Hz** Fuse: 40 A (slow) Engine: 11 kW Voltage: 24 V Protec. class: IP 55

We reserve the right to make changes to specifications without prior notice. \* Density varies with type of material. \*\* Other voltages are available

Orwak AB  
Svetsaregatan 4  
S-576 33 Sävsjö  
SWEDEN  
Tel: +46-(0)382-157 00  
info@orwak.com, www.orwak.com




**BRICKMAN**

# BRICKMAN 2000K

**BRICKMAN 2000K IS OUR REAL HEAVY DUTY VERSION DEVELOPED TO MAKE THE TASK OF COMPACTING EXTRA LARGE QUANTITIES OF BULKY WASTE, SUCH AS CARDBOARD AND PET BOTTLES AS SIMPLE AS POSSIBLE.**

The automated solution is time-saving and convenient and Brickman 2000K has the capacity to process up to 25 000 empty PET-bottles per hour!

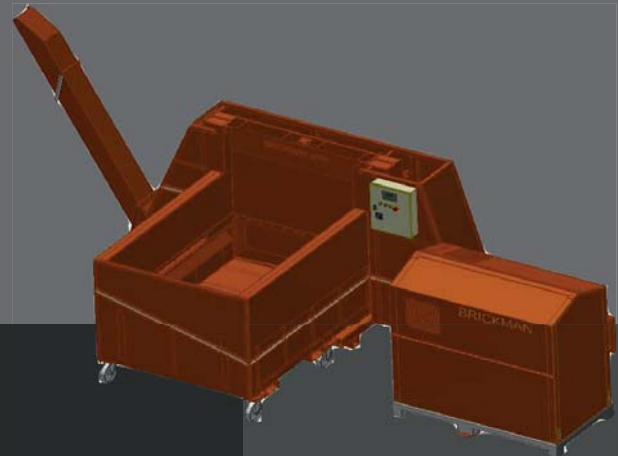

## Automatic solution



**1500** KG/H  
CAPACITY  
CARDBOARD

## Orwak benefits

### MORE PRODUCTIVE USE OF TIME

Less time spent on waste handling, more time for your core activities!

### MORE SPACE & ORDER

Our balers rapidly minimizes the space the waste takes up, keeping aisles free and tidy.

### LESS COSTS, MORE VALUE

More compaction = less waste volume to transport. Fewer transports required results in lower transportation costs and reduced CO<sub>2</sub> emissions. Sorting at source yields a higher quality of waste material for recycling.



## Why Brickman?

- + Convenient fully automated compaction solution
- + Impressive volume reduction of up to 20:1
- + Placement opportunities indoors

[www.orwak.com](http://www.orwak.com)

**ORWAK**

# BRICKMAN 2000K



## CONVENIENT AND EFFICIENT

Brickman offers time-saving and comfortable waste handling. The press can be fed while running, there is no lid or door to open when loading the material and the ready briquettes require no binding. Furthermore, optional photocells can automate the start function. The material infeed and briquette outfeed are easy to integrate in system solutions.

## GREAT LOGISTICS

Thanks to Brickman's compact dimensions, it can be placed indoors close to the waste disposal station.

## BRICKMAN 2000K IS OPTIMIZED FOR:

### CARDBOARD

+ Corrugated cardboard

### CAPACITY

up to 1500 kg/h

### PLASTIC

+ PET bottles

### CAPACITY

up to 1250 kg/h

## DESIGNED FOR HEAVY DUTY

Thanks to the following features, the robust briquette press Brickman 2000K is especially designed for compaction of large volumes of cardboard and empty PET bottles:

- + Extension on press cylinder
- + Automatic greasing of the press plate
- + Reinforced material in press chamber, press plate, cutting blades, guide piston and press loop

## OPTIONAL ACCESSORIES

Brickman 2000K can be ordered with a number of accessories; different chute options, start systems, sound absorption plates as well as heating and cooling devices. **NEW OPTION: Silent powerpack for very low sound emission.**



## DIMENSIONS & SPECIFICATIONS

### DIMENSIONS (MM)

A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R
2470	2010	905	1615	1420	1870	6300	1355	685	1600	920	1180	2430	265	1900	690	1350	535

### DIMENSIONS (MM)

S	T	U	V
980	1960	1300	1660

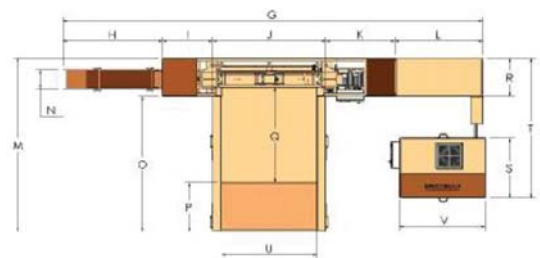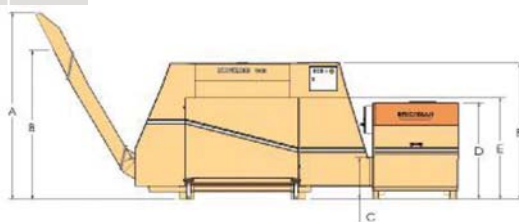

### TECHNICAL SPECIFICATIONS

MACHINE WEIGHT	PRESS FORCE	PRESSURE	HOPPER	BRIQUETTE SIZE	DENSITY*	NOISE LEVEL	OPERATING POWER
4000 kg	25 ton, 250 kN	Up to 62 kg/cm <sup>2</sup>	2 m <sup>2</sup>	200x200x100-300 mm	Up to 400 kg/m <sup>3</sup>	80 db (A)	400 V, 3-phase, 50 Hz** Fuse: 40 A (slow) Engine: 18.5 kW Voltage: 24 V Protec. class: IP 55

We reserve the right to make changes to specifications without prior notice. \* Density varies with type of material. \*\* Other voltages are available

Orwak AB  
Svetsaregatan 4  
S-576 33 Sävsjö  
SWEDEN  
Tel: +46-(0)382-157 00  
info@orwak.com, www.orwak.com

